


# EasyStart Wiring For Mermaid Marine Air Conditioners:

**Step 1:** Disconnect white (A) wire running from the Harness Plug to the Capacitor and connect it to the brown EasyStart wire.

**Step 2:** Disconnect the two black (B) wires running from the Hard Start to the Capacitor and tuck them out of the way.

**Step 3:** Connect the white EasyStart wire to the capacitor terminal that the white A wire from Step 1 was removed from.

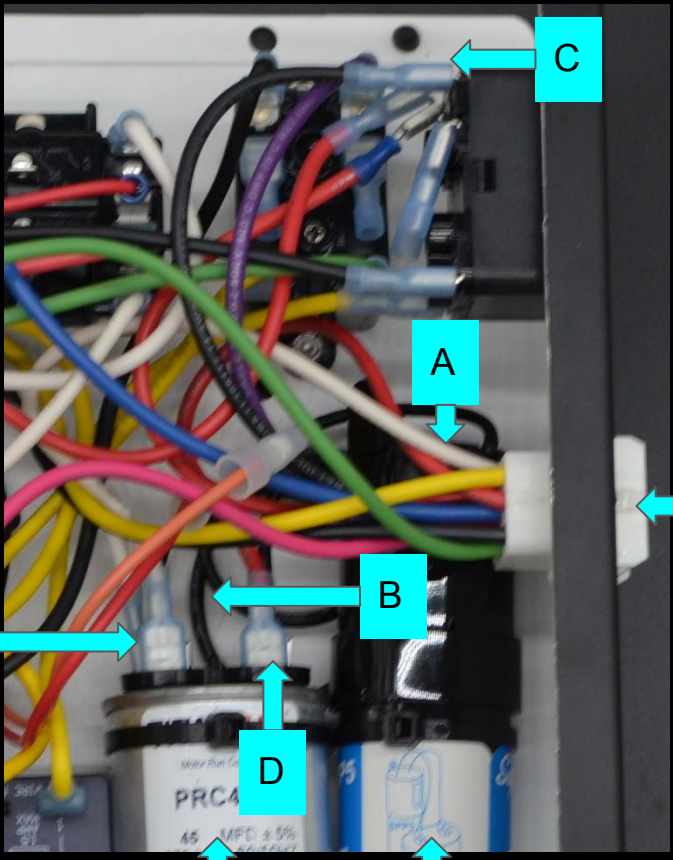

**Step 4:** Connect the black EasyStart wire to this black (C) wire. You can splice it into the existing black wire or use a piggy back connector and connect to the same terminal.

**Harness Plug**

**Step 5:** Connect the orange EasyStart wire to the same set of terminals that the red wire (D) is connected to on the capacitor.

**Capacitor**

**Hard Start**